
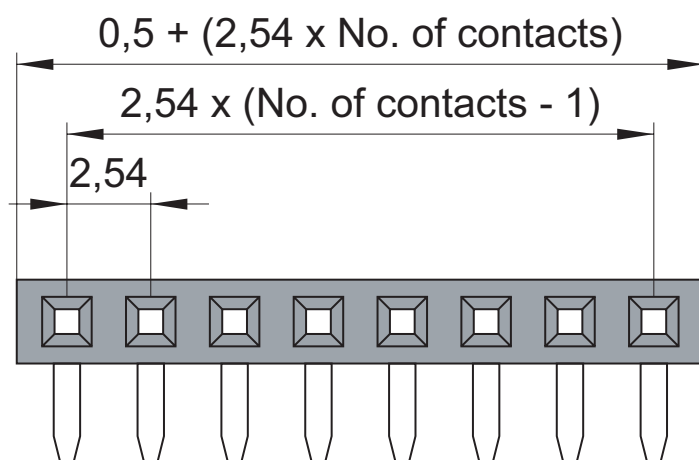




Buchsenleiste / Female header

Technical data:


Insulator:	P.B.T, UL94-V0
Contact:	Phosphor bronze
Plating:	Gold plated
Current rating:	3 Amp.
Insulation resistance:	5000 MOhm min.
Contact resistance:	20 mOhm max.
Dielectric withstanding:	AC 100 V for one minute
Operating temperature:	-40°C to +105°C

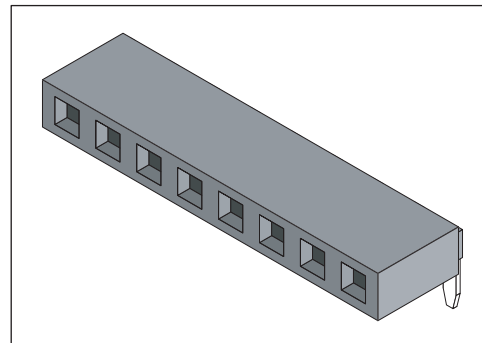

Pin 0,8 x 0,25

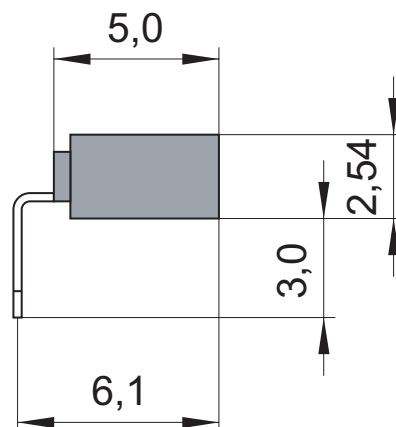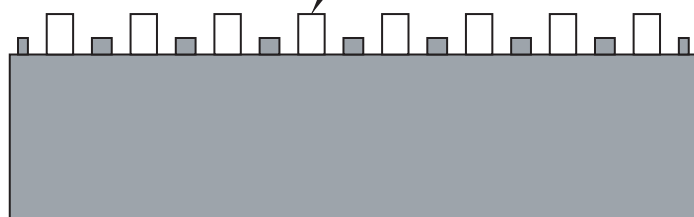

P.C.B. Layout

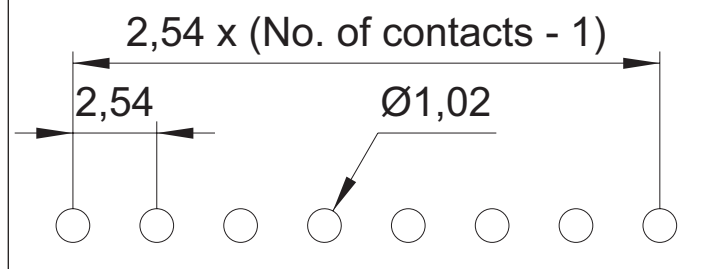

BL1-50AGG-xxx U