

MiniDIN-Steckverbinder, Konfektions-Version MiniDIN-connector, assembly-type



Isolierkörper
PBT, UL94V-0

Strombelastbarkeit
1A

Kontaktwiderstand
<15mΩ

Durchschlagsspannung
500V AC / 1 Minute

Isolationswiderstand
>1000MΩ bei 500V

Betriebstemperatur
-55°C - +105°C

Insulator
PBT, UL94V-0

Current rating
1A




Contact resistance
<15mΩ

Dielectric strength
500V DC / 1 minute

Insulations resistance
>1000MΩ at 500V DC

Operating temperature
-55°C - +105°C

| Dimension (Buchse/Female) | | |
|---------------------------|-------|-------|
| No. of contacts | A | B |
| 03 | 20.50 | 72.00 |
| 04 | 19.30 | 71.00 |
| 05 | 12.00 | 63.50 |
| 06 | 12.50 | 64.00 |
| 07 | 12.00 | 63.50 |
| 08 | 15.80 | 67.50 |

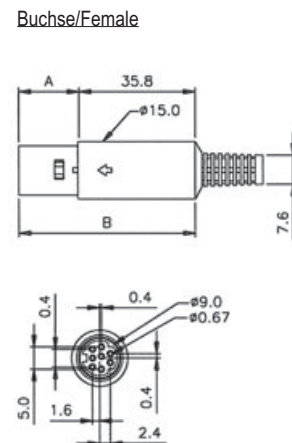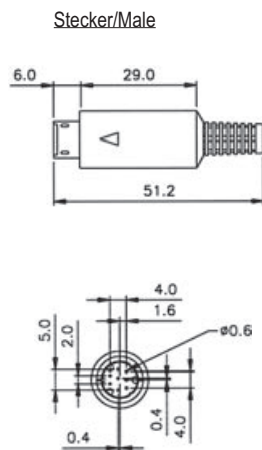

Bestellcode : **AD** - **DIO** - **x** / **x**
Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1. 2.

1.

Ausführung
M -Stecker
M/K -Buchse

Version
M -Male
M/K -Female

2.

Polzahl
03, 04, 05, 06, 07, 08

No. of contacts
03, 04, 05, 06, 07, 08

Kundenspezifische Kabelkonfektion möglich!
Customer designed cable assemblies available!